



Product name : Plate magnet for iron separation (waterproof) 850x60x40 / N

PERFORMANCE PARAMETERS

| | |
|--|---|
| Manufacturer | Enes Magnesy |
| Length | 850 [mm] |
| * Magnetic section length | 800 [mm] |
| Width | 60 [mm] |
| Height | 40 [mm] |
| With mounting hole | gwintowanym |
| Thread type | internal |
| Thread length | 10 [mm] |
| Thread size | M10 |
| Magnet type | Neodymium |
| polarity | biegunu naprzemienne |
| Maximum working temperature | ≤ 80 °[C] |
| Housing | stainless steel, AISI 304 / EN 1.4301, approved for contact with food |
| water-resistant | yes |
| Waterproof | class IP67 |
| Zasypowy | yes |
| hunged | yes |
| Range | max. 120 [mm] |
| work in systems with the flow of purified material | grawitacyjnym |
| Weight | 13.4 [kg] |


①



***MAX**
~19.2 kG

*BEST MINIMUM THICKNESS OF THE PLATE IS 4 mm

②

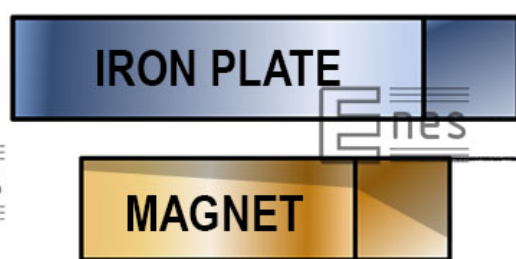


GAP 2 mm

***MAX**
~8.40 kG

*BEST MINIMUM THICKNESS OF THE PLATE IS 4 mm


③

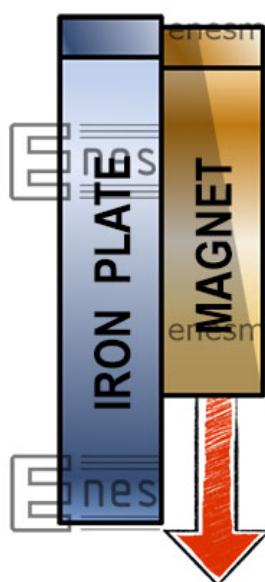

***MAX**
~3.85 kG

*BEST MINIMUM THICKNESS OF THE PLATE IS 4 mm


④

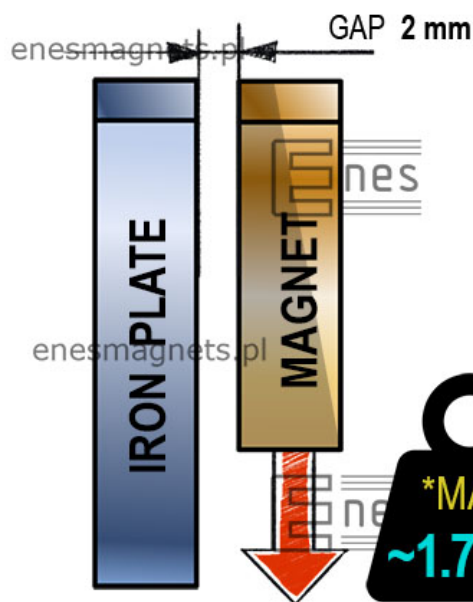


GAP 2 mm

***MAX**
~1.70 kG

*BEST MINIMUM THICKNESS OF THE PLATE IS 4 mm

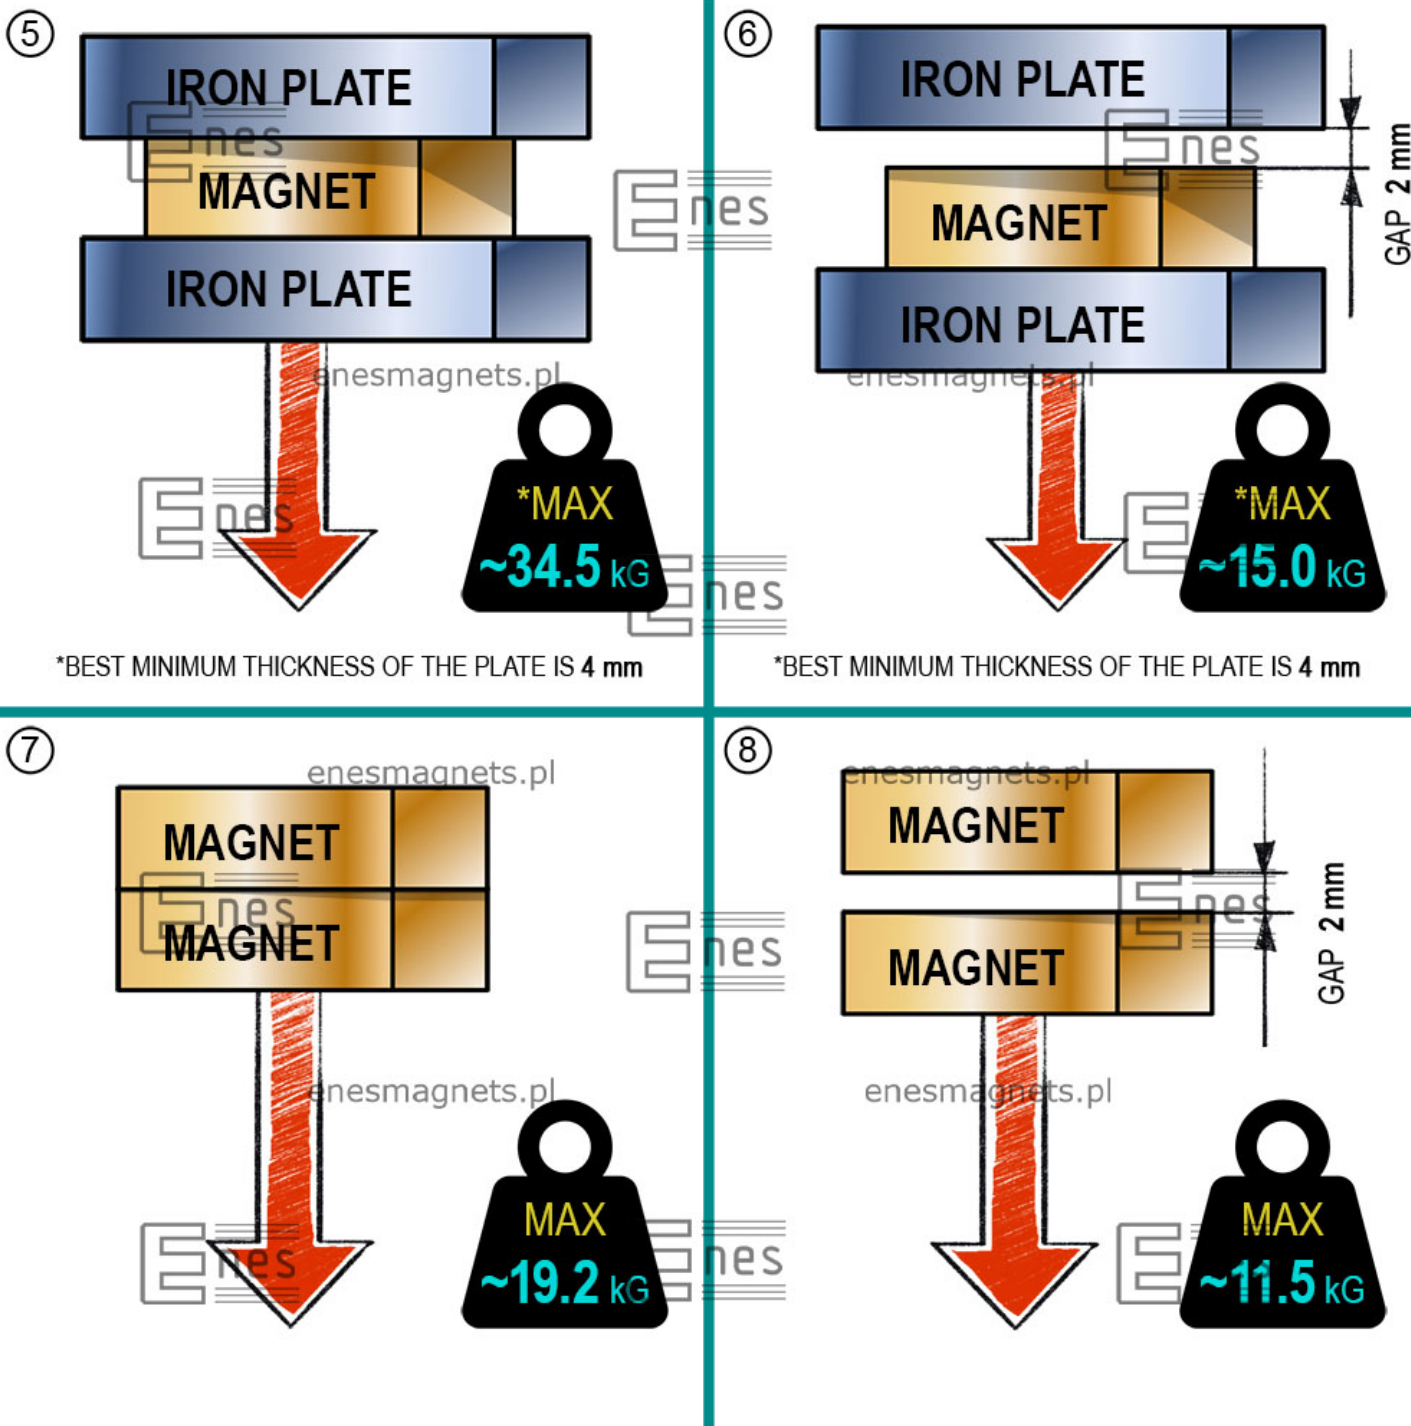

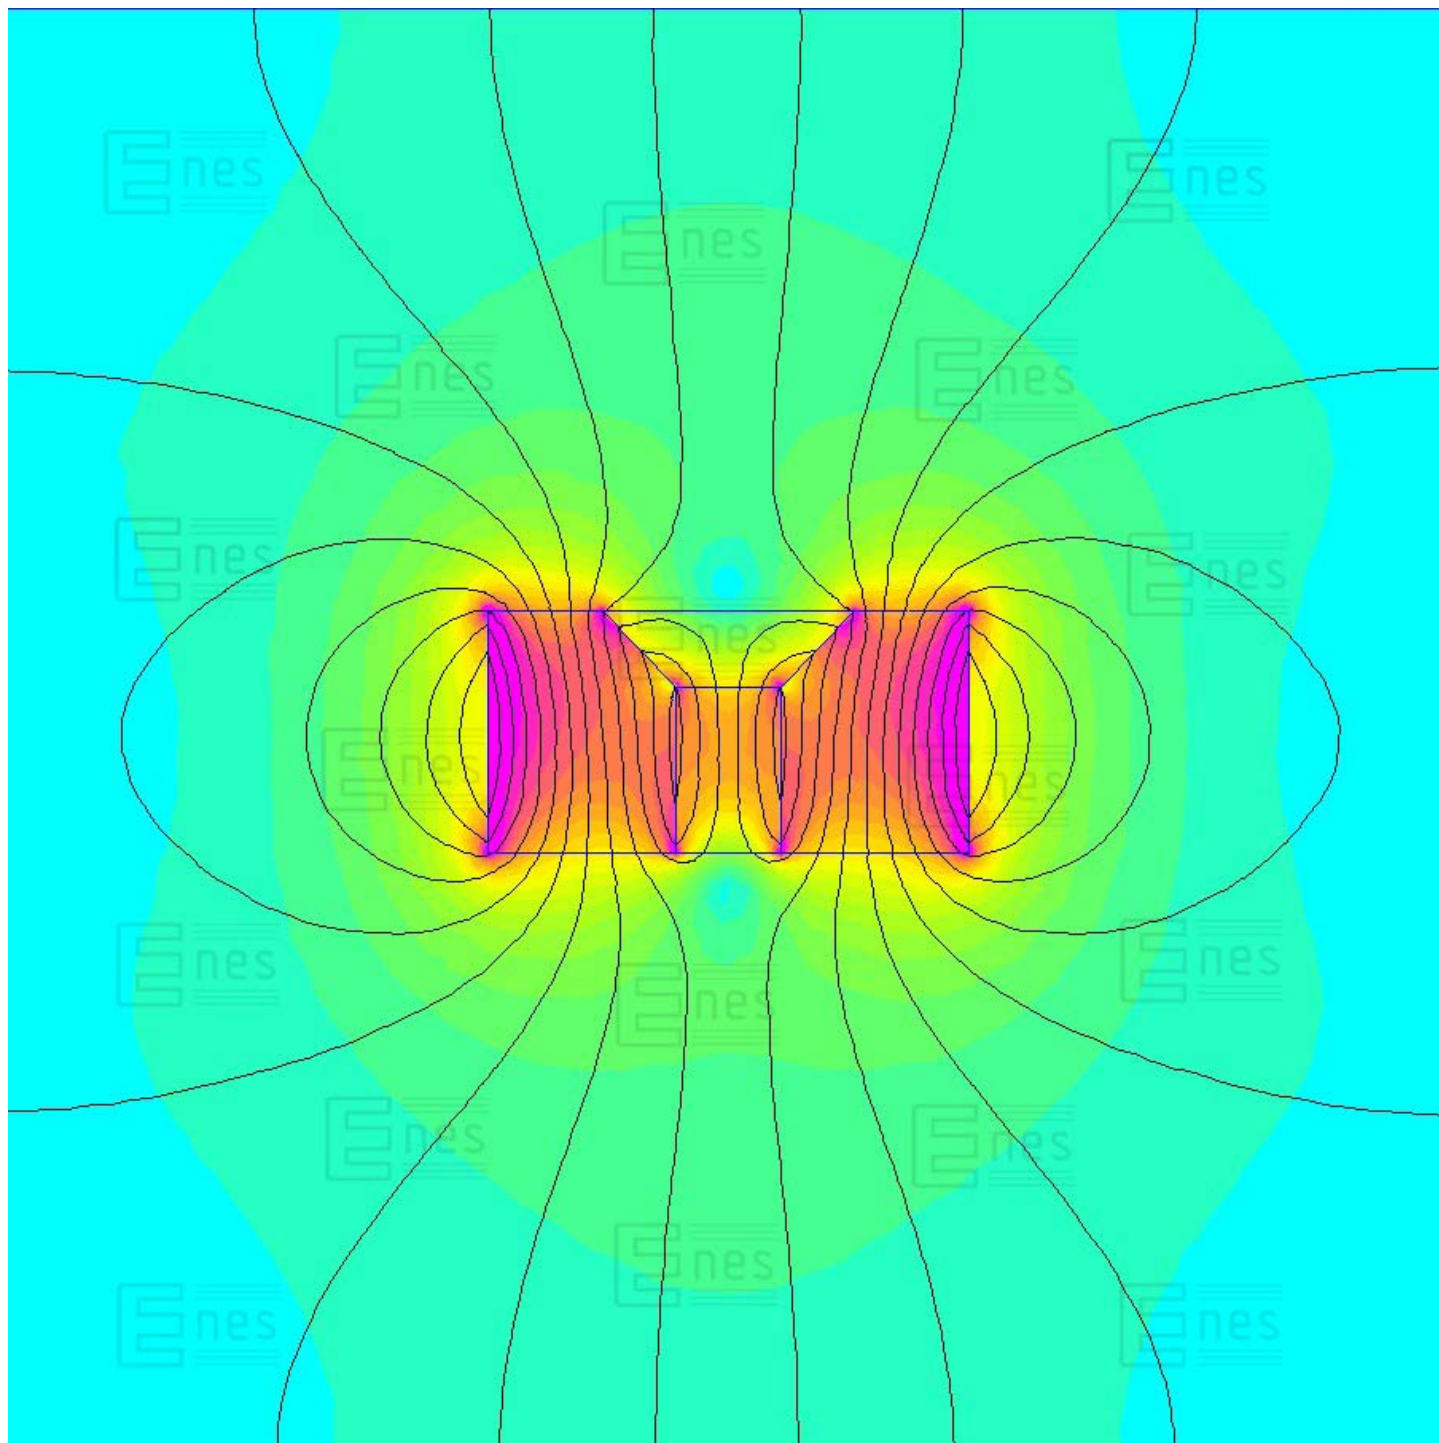

40X20X10 - Neodymium magnet

This is a block magnet with holes for countersunk screw head.

The magnet has a chamfered hole for mounting using a screw or a screw with a pointed head. It is a neodymium magnet, magnetised along the height. It has two poles, which means it is double-sided. It has been protected against corrosion by nickel plating. It has been manufactured according to excellent dimensional tolerances. The maximum operating temperature is no more than 80 degrees Celsius. Neodymium magnets stick to metal surface. You can attach magnet to surfaces made of ferromagnetic materials. This magnet is strong for its dimensions. This is a screw-on neodymium magnet. Neodymium magnet to screw on. Neodymium countersunk hole block. Neodymium magnetic block with a countersunk hole.

TECHNICAL DRAWING

